



SN-NVR2516E2

16CH 2HDD NVR



Key Features


- Up to 16ch IP cameras access
- Up to 8MP resolution recording
- 2 SATA hard disk up to 8TB
- 2 RJ45 10M/100M/1000M network interface
- Simultaneous HDMI&VGA up to 4K output
- Smart search & playback
- 8ch alarm In/1ch alarm Out
- 1ch audio I/O

Specification

Video Input	
IP Camera Input	16 Channel
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	160Mbps
Video Output	
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024
VGA Output	1920×1080, 1440×900, 1280×1024
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1, 16ch D1
Dual Stream	Support
Multi-screen Display	1/4/9/16
Recording	
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in
Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Network	
Interface	2 RJ-45 ports (10/100/1000Mbps)
PoE	N/A
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	8 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK

Storage	
HDD	2 SATA Ports, up to 8TB for each HDD
eSATA	N/A
Cloud Storage	N/A
Interface	
Audio I/O	1/1
Alarm Input	8ch
Alarm Output	1ch
USB	2 ports (USB 2.0 × 2)
General	
Power Supply	DC12V/4A
Power Consumption	< 5W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	372×310.5×46.5mm
Net Weight	2.1kg (without HDD)

Dimensions(mm)

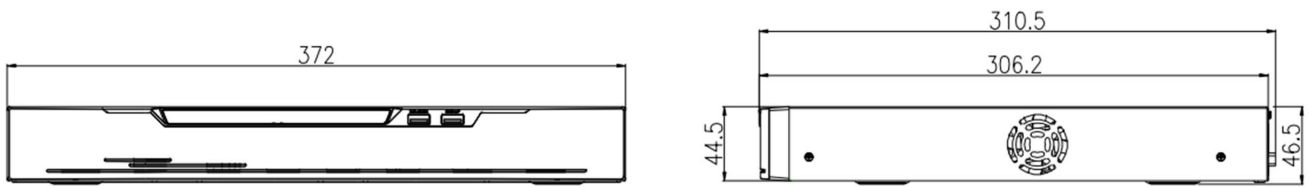

Rear Panel

